




# UNF BRAINGS SALES JAPAN CO.,LTD.

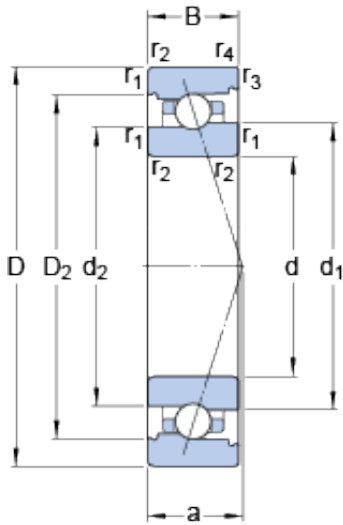

100 mm x 140 mm x 20 mm SKF 71920  
ACB/HCP4A Interchangeable with open TAC  
serie Precision Bearings

Bearing No. 71920 ACB/HCP4A

71920 ACB/HCP4A Bearing 2D drawings and 3D CAD models

Size	140x100x20 mm
Bore Diameter	140 mm
Outer Diameter	100 mm
Width	20 mm
d	100 mm
D	140 mm
B	20 mm
d <sub>1</sub>	114.92 mm
d <sub>2</sub>	113.16 mm
D <sub>2</sub>	128.7 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
a	41.4 mm
d <sub>a</sub> - min.	106 mm
d <sub>b</sub> - min.	106 mm
D <sub>a</sub> - max.	134 mm
D <sub>b</sub> - max.	136.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
d <sub>n</sub>	116.1 mm
Basic dynamic load rating - C	20.8 kN
Basic static load rating - C <sub>0</sub>	21.2 kN
Fatigue load limit - P <sub>u</sub>	0.815 kN



## UNF BRAINGS SALES JAPAN CO.,LTD.

Limiting speed for grease lubrication	13000 r/min
Limiting speed for oil lubrication	20000 mm/min
Ball - $D_w$	7.938 mm
Ball - z	37
$G_{ref}$	9.96 cm <sup>3</sup>
Calculation factor - e	0.68
Calculation factor - $Y_2$	0.87
Calculation factor - $Y_0$	0.38
Calculation factor - $X_2$	0.41
Calculation factor - $Y_1$	0.92
Calculation factor - $Y_2$	1.41
Calculation factor - $Y_0$	0.76
Calculation factor - $X_2$	0.67
Preload class A - $G_A$	125 N
Preload class B - $G_B$	250 N
Preload class C - $G_C$	750 N
Calculation factor - f	1.11
Calculation factor - $f_1$	0.99
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.02
Calculation factor - $f_{2C}$	1.08
Calculation factor - $f_{HC}$	1.01
Preload class A	178 N/micron
Preload class B	226 N/micron
Preload class C	343 N/micron
$d_1$	114.92 mm
$d_2$	113.16 mm
$D_2$	128.7 mm



## UNF BRAINGS SALES JAPAN CO.,LTD.

$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	106 mm
$d_b$ min.	106 mm
$D_a$ max.	134 mm
$D_b$ max.	136.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
$d_n$	116.1 mm
Basic dynamic load rating C	27.6 kN
Basic static load rating $C_0$	33.5 kN
Fatigue load limit $P_u$	0.815 kN
Attainable speed for grease lubrication	13000 r/min
Attainable speed for oil-air lubrication	20000 r/min
Ball diameter $D_w$	7.938 mm
Number of balls z	37
Reference grease quantity $G_{ref}$	9.96 cm <sup>3</sup>
Preload class A $G_A$	125 N
Static axial stiffness, preload class A	178 N/ $\mu$ m
Preload class B $G_B$	250 N
Static axial stiffness, preload class B	226 N/ $\mu$ m
Preload class C $G_C$	750 N
Static axial stiffness, preload class C	343 N/ $\mu$ m
Calculation factor f	1.11
Calculation factor $f_1$	0.99
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.02
Calculation factor $f_{2C}$	1.08



## UNF BRAINGS SALES JAPAN CO.,LTD.

Calculation factor $f_{HC}$	1.01
Calculation factor $e$	0.68
Calculation factor (single, tandem) $Y_2$	0.87
Calculation factor (single, tandem) $Y_0$	0.38
Calculation factor (single, tandem) $X_2$	0.41
Calculation factor (back-to-back, face-to-face) $Y_1$	0.92
Calculation factor (back-to-back, face-to-face) $Y_2$	1.41
Calculation factor (back-to-back, face-to-face) $Y_0$	0.76
Calculation factor (back-to-back, face-to-face) $X_2$	0.67
Mass bearing	0.8 kg